


```

BST.cpp
template <class K, class V>
void BST::_insert(TreeNode *& root, K & key, V & value) {
    TreeNode *t = _find(root, key);
    t = new TreeNode(key, value);
}
    
```

Running time? _____ Bound by? _____


What happens when we run the bugged code above?



How do we fix the code?

Removing an element from a BST:

- _remove (40)
- _remove (25)
- _remove (10)
- _remove (13)

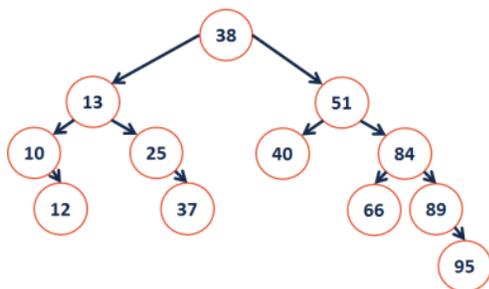

One-child Remove	Two-child remove

```

BinaryTree.cpp
template <class K, class V>
void BST::_remove(TreeNode *& root, const K & key) {
}
    
```

BST Analysis:

Every operation we have studied on a BST depends on:

...what is this in terms of the amount of data, **n**?

BST – Simple Proofs

Q: Given a height **h**, what is the maximum number of nodes (**n**) in a valid BST of height **h**? Provide an outline of a proof.

Q: Given a height **h**, what is the minimum number of nodes (**n**) in a valid BST of height **h**? Provide an outline of a proof.

Final BST Analysis

For every height-based algorithm on a BST:

Lower Bound:

Upper Bound:

Why use a BST over a linked list?

operation	BST Avg. Case	BST Worst Case	Sorted Array	Sorted List
find				
insert				
delete				
traverse				

Q: How does our data determine the height?

1 3 2 4 5 7 6 vs. 4 2 3 6 7 1 5


Q: How many different ways are there to insert data into a BST?

Q: What is the average height of every arrangement?

...what is the intuition here?

Height Balance on BST

What tree makes you happier?

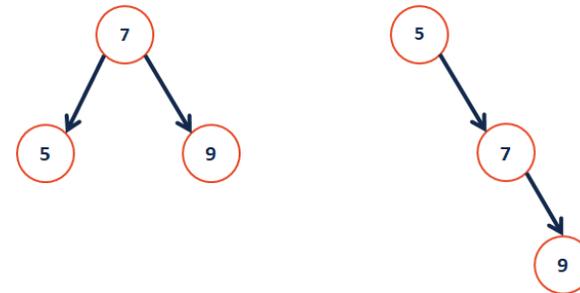

We define the **height balance** (b) of a BST to be:

We define a BST tree T to be **height balanced** if:

CS 225 – Things To Be Doing:

1. Theory Exam 2 starts next Thursday (topic list is available now!)
2. MP3 due Monday; MP4 released on Tuesday
3. lab_trees is due Sunday, Feb. 24
4. Daily POTDs